


## Inclined Seat Valve: Dirt Traps DN 65-500

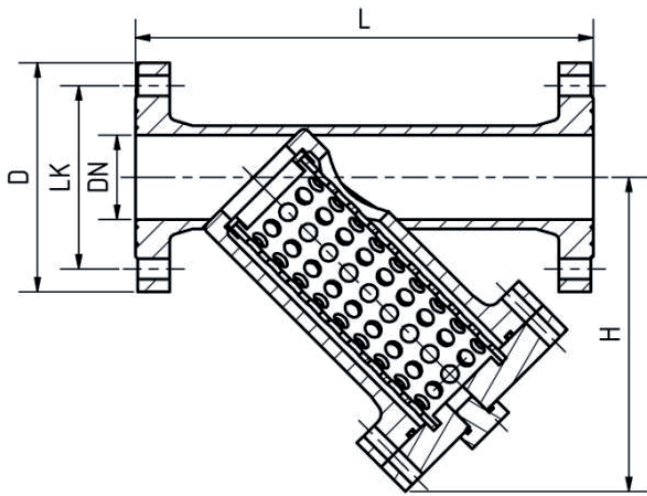

Flange acc.

### Dirt traps

To protect valves, sensors and pumps from pollutants, we recommend the use of Strainers made of PVC, PP and PVDF. This ensures reliable operation and extended service life for your components.

The broad product range includes different materials, end connectors, and standards, suiting a large variety of applications

### Spare parts


You can order many of wearing parts directly by us.

Nominal diameter			Dimensions					Kv (bar) p=1bar
d mm	DN mm	Zoll mm	L mm	H mm	LK mm	D mm	n x d2 mm	l/min
75	65	2 ½"	370	260	145	185	4 x ø18	500
90	80	3"	410	275	160	200	8 x ø18	1.000
110	100	4"	490	325	180	220	8 x ø18	1.600
140	125	5"	550	380	210	250	8 x ø18	3.000
160	150	6"	600	430	240	285	8 x ø22	4.500
225	200	8"	700	550	295	340	8 x ø22	10.000
280	250	10"	820	620	350	395	12 x ø22	
315	300	12"	950	780	400	445	12 x ø22	
355	350	14"	1.020	850	460	505	16 x ø22	
400	400	16"	1.120	950	515	565	16 x ø26	
500	500	20"	1.380	1.050	620	670	20 x ø26	


## Pot Strainer DN 65-500

### Pressure - temperature - diagram


#### PVC

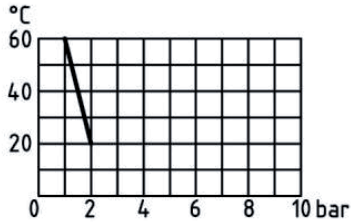

#### PP

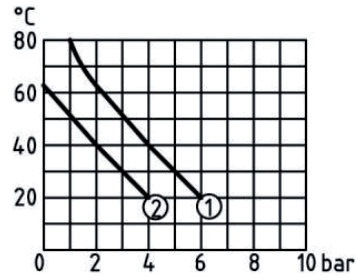

#### PVDF

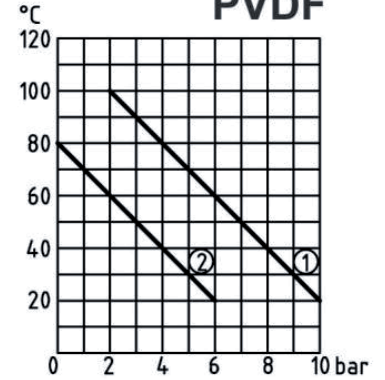

- (1). Up to ON 125
- (2) Ex ON 150

Nr	Description	Material
1.	Body	PVC, PP, PVDF
2	Holder/cover	PVC, PP, PVDF
3	Cage	PVC, PP, PVDF
4	Sieve	FEP
5	Cover	PVC, PP, PVDF
6	Seal	EPDM, FPM
7	Seal	EPDM, FPM
8	Plug	PVC, PP, PVDF
9.	Screw	A2
10.	Washer	A4
11.	Nut	A4

### Spare parts

You can order many of wearing parts directly by us.

